

Well-posedness and exact controllability of the mass balance equations for an extrusion process

Mamadou DIAGNE* Peipei SHANG[†] and Zhiqiang WANG[‡]

Abstract

In this paper, we study the well-posedness and exact controllability of a physical model for a food extrusion process in the isothermal case. The model expresses the mass balance in the extruder chamber and consists of a hyperbolic Partial Differential Equation (PDE) and a nonlinear Ordinary Differential Equation (ODE) whose dynamics describes the evolution of a moving interface. By suitable change of coordinates and fixed point arguments, we prove the existence, uniqueness and regularity of the solution, and finally the exact controllability of the coupled system.

Keywords: Conservation law, free boundary, well-posedness, controllability, extruder model.

2010 MR Subject Classification: 35L65, 35Q79, 35R37, 95B05

1 Introduction

The analysis of moving boundary problems has been an active subject in the last decades and their mathematical understanding continues to be an important interdisciplinary topic for various engineering applications. Representative complex physical systems describing biological phenomena and reaction diffusion processes such as Stefan problems in cristal growth processes are still calling for many open questions related to their exact controllability and the design of highly efficient output feedback control laws for stabilization purposes. Among these challenging problems, one can mention the swelling nanocapsules studied in [2], the lyophilization process applied to pharmaceutical industry [10, 33], the cooking processes describing the volume change in food material [30], the mixing systems (model of torus reactor including a well-mixed zone and a transport zone) and the Diesel Oxidation Catalyst (DOC) presented in [29].

*Department of Mechanical and Aerospace Engineering, University of California, San Diego, La Jolla, CA, 92093, USA. E-mail: mdianne@eng.ucsd.edu

[†]Department of Mathematics, Tongji University, Shanghai 200092, China. E-mail: peipeishang@hotmail.com.

[‡]School of Mathematical Sciences, Fudan University, Shanghai 200433, China. E-mail: wzq@fudan.edu.cn.

In general, the key point in such problems is to find a suitable change of coordinates which transforms the system with moving interface into a system defined on a fixed domain. While leading to more complicated infinite dimensional operator, such approaches allow to utilize the existing results that establish the existence, uniqueness, regularity and continuous dependence of solutions for many systems of conservation laws. For the well-posedness problems, we refer to [1, 3, 15, 16, 21, 28] (and the references therein) in the content of weak solutions to systems (including scalar case) of conservation laws, and [24, 27] in the content of classical solutions to general quasi-linear hyperbolic systems. The control problems for hyperbolic conservation laws have been widely studied for a long time. For controllability of linear hyperbolic systems, one can see the important survey [31]. The controllability of nonlinear hyperbolic equations (or systems) are studied in [5, 6, 9, 23, 26]. Moreover, [4] provides a comprehensive survey of controllability and stabilization in PDEs that also includes nonlinear conservation laws.

In this paper we consider the well-posedness and exact controllability of the Cauchy problem for a physical model of the extrusion process which describes the mass transport phenomena in an isothermal extruder chamber. Mathematically, the process is described by a hyperbolic PDE defined on a time-varying domain. The dynamics of the spatial domain is governed by an ODE expressing the conservation of mass in the extruder and the PDE expresses the convection phenomenon due to the rotating screw. More detailed description of the model is given in Section 2. We mention that the first result concerning the mathematical analysis of the extrusion model as transport equations coupled via complementary time varying domains is proposed in [12], where the well-posedness for the linearized model of the extruder is obtained by using perturbation theory on the linear operator.

Our proof of the well-posedness (see **Theorem 3.1**) of the Cauchy problem for the extrusion model relies on the characteristic method and the fixed point arguments. The H^2 -regularity of the solution is proved as well (see **Theorem 3.2**), which is useful when one considers the asymptotic stabilization of the corresponding closed-loop system with feedback controls [13]. In this context the stabilization of a non-isothermal food extrusion process including the temperature and the moisture content dynamics is investigated in [14]. The idea to prove **Theorem 3.3** is to construct a solution to (2.2)-(2.4) which also satisfies the final conditions. The way of such construction is based on the controllability result of the linearized system together with fixed point arguments (see for example [8]).

The organization of this paper is as follows: First in Section 2, we give a description of the extrusion process model which is derived from conservation laws. The main results (**Theorems 3.1, 3.2, 3.3**) concerning the well-posedness, regularity and the controllability of the normalized system are presented in Section 3, while their proofs are given in Sections 4, 5, 6 respectively.

2 Description of the extrusion process model

Extruders are designed to process highly viscous materials. They are mainly used in the chemical industries for polymer processing as well as in the food industries. An extruder is made of a barrel, the temperature of which is regulated. One or two Archimedean screws are rotating inside the barrel. The extruder is equipped with a die where the material comes out of the process (see Fig. 1).

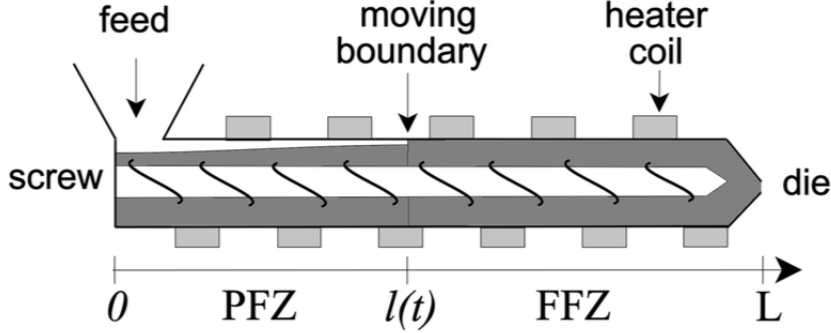


Fig. 1: Schematic description of an extruder

In an extruder, the net flow at the die exit is mainly due to the flow of the material in the screw axis direction. The die resistance influences highly the transport along the extruder and induces an accumulation phenomenon towards the down barrel direction. The accumulation of the material permits us to represent the mass balance in the extruder using the *filling ratio* along its screw channel. More precisely, the spatial domain of the extruder might be partitioned into a *Fully Filled Zone (FFZ)* and a *Partially Filled Zone (PFZ)*. The flow in the *FFZ* depends on the pressure gradient which appears in this region due to the die restriction. The *PFZ* corresponds to a conveying region that is submitted to the constant atmospheric pressure and the transport velocity of the material depends only on the screw speed and pitch. These two zones are coupled by an interface which is located at the spatial coordinate where the pressure gradient changes from zero to a nonzero value. Basically, the moving interface evolves as a function of the difference between the feed and die rates. In the sequel, the spatial domain of the extruder will be taken as the real interval $[0, L]$, where $L > 0$ is the length of the extruder. Let us denote by $l(t) \in [0, L]$ the position of the thin interface, the domain of the *PFZ* is then $[0, l(t)]$ and the *FFZ* is defined on $[l(t), L]$ (see Fig. 1).

Considering the following change of variables [11]

$$x \mapsto y = \frac{x}{l(t)} \text{ in } PFZ \text{ and } x \mapsto y = \frac{x - l(t)}{L - l(t)} \text{ in } FFZ \quad (2.1)$$

respectively, the time varying domains $[0, l(t)]$ and $[l(t), L]$ can be transformed to the fixed

domain $[0, 1]$ in space. For the sake of simplicity, we still denote by x the space variable instead of y . More precisely, we consider the problem for the corresponding normalized system defined on $(0, T) \times (0, 1)$.

Defining the filling ratio along the PFZ spatial domain, namely, $f_p(t, x)$ as a dynamical variable [20, 22], then the mass balance in this region is written as follows:

$$\begin{cases} \partial_t f_p(t, x) + \alpha_p \partial_x f_p(t, x) = 0, & \text{in } \mathbb{R}^+ \times (0, 1), \\ f_p(0, x) = f_p^0(x), & \text{in } (0, 1), \\ f_p(t, 0) = \frac{F_{in}(t)}{\rho_o V_{eff} N(t)}, & \text{in } \mathbb{R}^+, \end{cases} \quad (2.2)$$

where

$$\alpha_p(x, N(t), l(t), f_p(t, 1)) = \frac{\zeta N(t) - x F(l(t), N(t), f_p(t, 1))}{l(t)} \quad (2.3)$$

and α_p is the transport velocity of the material, ζ is the screw pitch, F_{in} denotes the feed rate, ρ_o is the melt density, V_{eff} is the effective volume and $N(t)$ is the rotation speed of the screw. F is the dynamics of the moving interface described by equations (2.4)-(2.5). The interface motion is generated by the gradient of pressure which appears in the FFZ [18, 19, 20, 22] and under the assumption of constant viscosity along the extruder (the isothermal case), its evolution is given by the following

$$\begin{cases} \dot{l}(t) = F(l(t), N(t), f_p(t, 1)), & \text{in } \mathbb{R}^+, \\ l(0) = l^0, \end{cases} \quad (2.4)$$

where

$$F(l(t), N(t), f_p(t, 1)) = N(t)g(l(t), f_p(t, 1)), \quad (2.5)$$

with

$$g(l(t), f_p(t, 1)) = \frac{\zeta K_d (L - l(t))}{[B\rho_o + K_d(L - l(t))](1 - f_p(t, 1))} - \frac{\zeta f_p(t, 1)}{1 - f_p(t, 1)}. \quad (2.6)$$

In (2.6), K_d denotes the die conductance and B is the geometric parameter.

In the whole paper, unless otherwise specified, we always assume that $l^0 \in (0, L)$, $f_p^0 \in W^{1,\infty}(0, 1)$, $F_{in}, N \in L^\infty(0, T)$, $F_{in}/N \in W^{1,\infty}(0, T)$. For the sake of simplicity, we denote from now on $\|f\|_{L^\infty}$ ($\|f\|_{W^{1,\infty}}$, $\|f\|_{L^2}$, resp.) as the L^∞ ($W^{1,\infty}$, L^2 , resp.) norm of the function f with respect to its variables.

3 Main Results

In this section, we present the main results on the well-posedness and exact controllability of the coupled system (2.2)-(2.4), we have the following two theorems.

Theorem 3.1. *Let $T > 0$ and (l_e, N_e, f_{pe}) be a constant equilibrium, i.e.,*

$$F(l_e, N_e, f_{pe}) = 0 \quad (3.1)$$

with $0 < f_{pe} < 1$, $0 < l_e < L$. Assume that the compatibility condition at $(0, 0)$ holds

$$\frac{F_{in}(0)}{\rho_0 V_{eff} N(0)} = f_p^0(0). \quad (3.2)$$

Then, there exists $\varepsilon_0 > 0$ (depending on T) such that for any $\varepsilon \in (0, \varepsilon_0]$, if

$$|l^0 - l_e| + \|f_p^0(\cdot) - f_{pe}\|_{W^{1,\infty}} + \left\| \frac{F_{in}(\cdot)}{\rho_0 V_{eff} N(\cdot)} - f_{pe} \right\|_{W^{1,\infty}} + \|N(\cdot) - N_e\|_{L^\infty} \leq \varepsilon, \quad (3.3)$$

Cauchy problem (2.2)-(2.4) admits a unique solution $(l, f_p) \in W^{1,\infty}(0, T) \times W^{1,\infty}((0, T) \times (0, 1))$, and the following estimates hold

$$\|l(\cdot) - l_e\|_{W^{1,\infty}} \leq C_{\varepsilon_0} \cdot \varepsilon, \quad (3.4)$$

$$\|f_p(\cdot, \cdot) - f_{pe}\|_{W^{1,\infty}} \leq C_{\varepsilon_0} \cdot \varepsilon, \quad (3.5)$$

where C_{ε_0} is a constant depending on ε_0 , but independent of ε .

Theorem 3.2. Under the assumptions of Theorem 3.1, we assume furthermore that $f_p^0(\cdot) \in H^2(0, 1)$, $\frac{F_{in}(\cdot)}{\rho_0 V_{eff} N(\cdot)} \in H^2(0, T)$, and the compatibility condition at $(0, 0)$ holds

$$(f_p^0)_x(0) + \frac{l(0)}{\zeta N(0)} \cdot \frac{d}{dt} \left(\frac{F_{in}(t)}{\rho_0 V_{eff} N(t)} \right) \Big|_{t=0} = 0. \quad (3.6)$$

Then, there exists $\varepsilon_0 > 0$ (depending on T) such that for any $\varepsilon \in (0, \varepsilon_0]$, if

$$|l^0 - l_e| + \|f_p^0(\cdot) - f_{pe}\|_{H^2(0,1)} + \left\| \frac{F_{in}(\cdot)}{\rho_0 V_{eff} N(\cdot)} - f_{pe} \right\|_{H^2(0,T)} + \|N(\cdot) - N_e\|_{L^\infty} \leq \varepsilon, \quad (3.7)$$

Cauchy problem (2.2)-(2.4) has a unique solution $(l, f_p) \in W^{1,\infty}(0, T) \times C^0([0, T]; H^2(0, 1))$ with the additional estimate

$$\|f_p(\cdot, \cdot) - f_{pe}\|_{C^0([0,T]; H^2(0,1))} \leq C_{\varepsilon_0} \cdot \varepsilon, \quad (3.8)$$

where C_{ε_0} is a constant depending on ε_0 , but independent of ε .

Remark 3.1. The solution in Theorem 3.1 or in Theorem 3.2 is often called semi-global solution since it exists on any preassigned time interval $[0, T]$ provided that (l, f_p) has some kind of smallness (depending on T), see [25, 34].

Remark 3.2. We have the hidden regularity that $f_p \in C^0([0, 1]; H^2(0, T))$ in Theorem 3.2 (see [7, 32] for the idea of proof).

The problem of exact controllability for Cauchy problem (2.2)-(2.4) can be described as follows: For any given initial data $(l^0, f_p^0(x))$, any final data $(l^1, f_p^1(x))$, to find a time T and controls $F_{in}(t)$ and $N(t)$ such that the solution to Cauchy problem (2.2)-(2.4) satisfies

$$l(T) = l^1, \quad (3.9)$$

$$f_p(T, x) = f_p^1(x). \quad (3.10)$$

Our result is the following theorem on local controllability in the sense that the initial and final data are both close to the given equilibrium determined by (3.1).

Theorem 3.3. *Let*

$$T_e := \frac{l_e}{\zeta N_e} \quad (3.11)$$

be the critical control time. Then, for any $T > T_e$, there exists $\nu_1 > 0$ suitably small such that, for any $\nu \in (0, \nu_1]$, $l^0, l^1 \in (0, L)$ and $f_p^0, f_p^1 \in W^{1,\infty}(0, 1)$ with

$$|l^0 - l_e| + |l^1 - l_e| + \|f_p^0(\cdot) - f_{pe}\|_{W^{1,\infty}} + \|f_p^1(\cdot) - f_{pe}\|_{W^{1,\infty}} \leq \nu, \quad (3.12)$$

there exist $N \in L^\infty(0, T)$ and $F_{in} \in L^\infty(0, T)$ satisfying

$$\left\| \frac{F_{in}(\cdot)}{\rho_0 V_{eff} N(\cdot)} - f_{pe} \right\|_{W^{1,\infty}} + \|N(\cdot) - N_e\|_{L^\infty} \leq C_{\nu_1} \cdot \nu, \quad (3.13)$$

such that the weak solution $(l(t), f_p(t, x))$ to Cauchy problem (2.2)-(2.4) satisfies the final condition (3.9)-(3.10). Here, C_{ν_1} is a constant depending on ν_1 , but independent of ν .

4 Proof of Theorem 3.1

In order to conclude Theorem 3.1, it suffices to prove the following lemma on local well-posedness of Cauchy problem (2.2)-(2.4).

Lemma 4.1. *There exist $\varepsilon_1 > 0$ and $\delta > 0$ suitably small, such that for any $\varepsilon \in (0, \varepsilon_1]$, $l^0 \in (0, L)$, $f_p^0 \in W^{1,\infty}(0, 1)$, $F_{in}/N \in W^{1,\infty}(0, T)$ with*

$$|l^0 - l_e| + \|f_p^0(\cdot) - f_{pe}\|_{W^{1,\infty}} + \left\| \frac{F_{in}(\cdot)}{\rho_0 V_{eff} N(\cdot)} - f_{pe} \right\|_{W^{1,\infty}} + \|N(\cdot) - N_e\|_{L^\infty} \leq \varepsilon, \quad (4.1)$$

Cauchy problem (2.2)-(2.4) admits a unique local solution on $[0, \delta]$, which satisfies the following estimates

$$|l(t) - l_e| \leq C_{\varepsilon_1} \cdot \varepsilon, \quad \forall t \in [0, \delta], \quad (4.2)$$

$$\|f_p(t, \cdot) - f_{pe}\|_{W^{1,\infty}} \leq C_{\varepsilon_1} \cdot \varepsilon, \quad \forall t \in [0, \delta], \quad (4.3)$$

where C_{ε_1} is a constant depending on ε_1 , but independent of ε .

Let us first show how to conclude Theorem 3.1 from Lemma 4.1. By Lemma 4.1, we take $\varepsilon_2 \in (0, \varepsilon_1]$ such that $C_{\varepsilon_1} \cdot \varepsilon_2 \leq \varepsilon_1$. Then for any $\varepsilon \in (0, \varepsilon_2]$ and any initial-boundary data such that (4.1) holds, Cauchy problem (2.2)-(2.4) admits a unique solution on $[0, \delta]$. Furthermore, one has

$$|l(\delta) - l_e| \leq C_{\varepsilon_1} \cdot \varepsilon \leq \varepsilon_1, \quad (4.4)$$

$$\|f_p(\delta, \cdot) - f_{pe}\|_{W^{1,\infty}} \leq C_{\varepsilon_1} \cdot \varepsilon \leq \varepsilon_1. \quad (4.5)$$

By taking $(l(\delta), f_p(\delta, \cdot))$ as new initial data and applying Lemma 4.1 on $[\delta, 2\delta]$, the solution of Cauchy problem (2.2)-(2.4) is extended to $[0, 2\delta]$. For fixed $T > 0$, we can extend the local solution to Cauchy problem (2.2)-(2.4) to $[0, T]$ eventually by reducing the value of ε_0

and applying Lemma 4.1 in finite times (at most $[T/\delta] + 1$ times). Therefore, to conclude Theorem 3.1, it remains to prove Lemma 4.1. $\square$

Proof of Lemma 4.1: The proof is divided into 4 steps.

Step 1. Existence and uniqueness of $(l(\cdot), f_p(\cdot, 1))$ by fixed point argument.

Let $\varepsilon_1 > 0$ be such that

$$0 < \varepsilon_1 < \min\{l_e, L - l_e, f_{pe}, 1 - f_{pe}\}. \quad (4.6)$$

Denote

$$\|F\|_{W^{1,\infty}} := \sum_{|\alpha| \leq 1} \operatorname{ess\,sup}_{\substack{0 < x_1 < L \\ N_e - \varepsilon_1 < x_2 < N_e + \varepsilon_1 \\ 0 < x_3 < 1}} |D^\alpha F(x_1, x_2, x_3)|, \quad (4.7)$$

$$\Psi(t) := (l(t), f_p(t, 1)), \quad t \in [0, T]. \quad (4.8)$$

For any given $\delta > 0$ small enough (to be chosen later), we define a domain candidate as a closed subset of $C^0([0, \delta])$ with respect to C^0 norm:

$$\Omega_{\delta, \varepsilon_1} := \left\{ \Psi \in C^0([0, \delta]) \mid \Psi(0) = (l^0, f_p^0(1)), \|\Psi(\cdot) - (l_e, f_{pe})\|_{C^0([0, \delta])} \leq \varepsilon_1 \right\}. \quad (4.9)$$

We denote by $\xi(s; t, x)$, with $(s, \xi(s; t, x)) \in [0, t] \times [0, 1]$, the characteristic curve passing through the point $(t, x) \in [0, \delta] \times [0, 1]$ (see Fig. 2), i.e.,

$$\begin{cases} \frac{d\xi(s; t, x)}{ds} = \alpha_p(\xi(s; t, x), N(s), l(s), f_p(s, 1)), \\ \xi(t; t, x) = x. \end{cases} \quad (4.10)$$

Let us define a map $\mathfrak{F} := (\mathfrak{F}_1, \mathfrak{F}_2)$, where $\mathfrak{F} : \Omega_{\delta, \varepsilon_1} \rightarrow C^0([0, \delta])$, $\Psi \mapsto \mathfrak{F}(\Psi)$ as

$$\mathfrak{F}_1(\Psi)(t) := l^0 + \int_0^t F(l(s), N(s), f_p(s, 1)) ds, \quad (4.11)$$

$$\mathfrak{F}_2(\Psi)(t) := f_p^0(\xi(0; t, 1)). \quad (4.12)$$

Solving the linear ODE (4.10) with α_p given by (2.3), one easily gets for all δ small and all $0 \leq s \leq t \leq \delta$ that

$$\xi(s; t, 1) = e^{\int_s^t \frac{F(l(\sigma), N(\sigma), f_p(\sigma, 1))}{l(\sigma)} d\sigma} - \int_s^t \frac{\zeta N(\sigma)}{l(\sigma)} \cdot e^{\int_s^\sigma \frac{F(l(s), N(s), f_p(s, 1))}{l(s)} ds} d\sigma. \quad (4.13)$$

It is obvious that $\mathfrak{F}$ maps into $\Omega_{\delta, \varepsilon_1}$ itself if

$$0 < \delta < \min \left\{ T, \frac{l_e - \varepsilon_1}{\zeta(N_e + \varepsilon_1)}, \frac{l_e - \varepsilon_1}{\|F\|_{W^{1,\infty}}}, \frac{L - l_e - \varepsilon_1}{\|F\|_{W^{1,\infty}}} \right\}, \quad (4.14)$$

Now we prove that, if δ is small enough, $\mathfrak{F}$ is a contraction mapping on $\Omega_{\delta, \varepsilon_1}$ with respect to the C^0 norm. Let $\Psi = (l, f_p)$, $\bar{\Psi} = (\bar{l}, \bar{f}_p) \in \Omega_{\delta, \varepsilon_1}$. We denote by $\bar{\xi}(s; t, x)$ the corresponding characteristic curve passing through (t, x) :

$$\begin{cases} \frac{d\bar{\xi}(s; t, x)}{ds} = \alpha_p(\bar{\xi}(s; t, x), N(s), \bar{l}(s), \bar{f}_p(s, 1)), \\ \bar{\xi}(t; t, x) = x. \end{cases} \quad (4.15)$$

Similarly as (4.13), one has for all δ small and all $0 \leq s \leq t \leq \delta$ that

$$\bar{\xi}(s; t, 1) = e^{\int_s^t \frac{F(\bar{l}(\sigma), N(\sigma), \bar{f}_p(\sigma, 1))}{\bar{l}(\sigma)} d\sigma} - \int_s^t \frac{\zeta N(\sigma)}{\bar{l}(\sigma)} \cdot e^{\int_s^\sigma \frac{F(\bar{l}(s), N(s), \bar{f}_p(s, 1))}{\bar{l}(s)} ds} d\sigma. \quad (4.16)$$

Therefore it holds for all $t \in [0, \delta]$ that

$$\begin{aligned} |\mathfrak{F}_1(\bar{\Psi})(t) - \mathfrak{F}_1(\Psi)(t)| &= \left| \int_0^t F(\bar{l}(s), N(s), \bar{f}_p(s, 1)) ds - \int_0^t F(l(s), N(s), f_p(s, 1)) ds \right| \\ &\leq \delta \|F\|_{W^{1,\infty}} \|\bar{\Psi} - \Psi\|_{C^0([0, \delta])}. \end{aligned} \quad (4.17)$$

On the other hand, it follows from (4.12), (4.13) and (4.16), that for all $t \in [0, \delta]$,

$$\begin{aligned} &|\mathfrak{F}_2(\bar{\Psi})(t) - \mathfrak{F}_2(\Psi)(t)| \\ &= |f_p^0(\bar{\xi}(0; t, 1)) - f_p^0(\xi(0; t, 1))| \\ &\leq \|f_{px}^0\|_{L^\infty} \left(\left| e^{\int_0^t \frac{F(\bar{l}(\sigma), N(\sigma), \bar{f}_p(\sigma, 1))}{\bar{l}(\sigma)} d\sigma} - e^{\int_0^t \frac{F(l(\sigma), N(\sigma), f_p(\sigma, 1))}{l(\sigma)} d\sigma} \right| \right. \\ &\quad \left. + \int_0^t \left| \frac{\zeta N(\sigma)}{\bar{l}(\sigma)} \cdot e^{\int_0^\sigma \frac{F(\bar{l}(s), N(s), \bar{f}_p(s, 1))}{\bar{l}(s)} ds} - \frac{\zeta N(\sigma)}{l(\sigma)} \cdot e^{\int_0^\sigma \frac{F(l(s), N(s), f_p(s, 1))}{l(s)} ds} \right| d\sigma \right). \end{aligned}$$

By (4.7) and the fact that $\Psi, \bar{\Psi} \in \Omega_{\delta, \varepsilon_1}$ and $l(t) \geq l_e - \varepsilon_1 > 0, |N(t)| \leq N_e + \varepsilon_1$, it follows that for all $t \in [0, \delta]$,

$$|\mathfrak{F}_2(\bar{\Psi})(t) - \mathfrak{F}_2(\Psi)(t)| \leq C\delta \|f_p^0(\cdot) - f_{pe}\|_{W^{1,\infty}} \|\bar{\Psi} - \Psi\|_{C^0([0, \delta])}, \quad (4.18)$$

where $C > 0$ is a constant independent of $(\bar{\Psi}, \Psi)$. Finally, combining (4.17) and (4.18), we can choose δ small enough such that

$$\|\mathfrak{F}(\bar{\Psi}) - \mathfrak{F}(\Psi)\|_{C^0([0, \delta])} \leq \frac{1}{2} \|\bar{\Psi} - \Psi\|_{C^0([0, \delta])}. \quad (4.19)$$

Banach fixed point theorem implies the existence of the unique fixed point $(l(\cdot), f_p(\cdot, 1))$ of the mapping $\mathfrak{F}: \Psi = \mathfrak{F}(\Psi)$ in $\Omega_{\delta, \varepsilon_1}$.

Step 2. Construction of a solution by characteristic method.

With the existence of $(l(\cdot), f_p(\cdot, 1))$ and $\delta > 0$ by **Step 1**, we can construct a solution to Cauchy problem (2.2)-(2.4). For every (t, x) in $[0, \delta] \times [0, 1]$, we still denote by $\xi(s; t, x)$, with $(s, \xi(s; t, x)) \in [0, t] \times [0, 1]$, the characteristic curve passing through the point (t, x) , see (4.10). Since the velocity function α_p is positive, the characteristic $\xi(s; t, x)$ intersects the x -axis at point $(0, \beta(t, x))$ with $\beta(t, x) = \xi(0; t, x)$ if $0 \leq \xi(t; 0, 0) \leq x \leq 1$; the characteristic $\xi(s; t, x)$ intersects the t -axis at point $(\tau(t, x), 0)$ with $\xi(\tau(t, x); t, x) = 0$ if $0 \leq x \leq \xi(t; 0, 0)$ (see Fig. 2). Moreover, we have (see [27, Lemma 3.2 and its proof, Page 90-91] for a more general situation)

$$\frac{\partial \tau(t, x)}{\partial x} = \frac{-l(\tau(t, x))}{\zeta N(\tau(t, x))} e^{\int_{\tau(t, x)}^t \frac{F(l(\sigma), N(\sigma), f_p(\sigma, 1))}{l(\sigma)} d\sigma}, \quad (4.20)$$

$$\frac{\partial \beta(t, x)}{\partial x} = e^{\int_0^t \frac{F(l(\sigma), N(\sigma), f_p(\sigma, 1))}{l(\sigma)} d\sigma}. \quad (4.21)$$

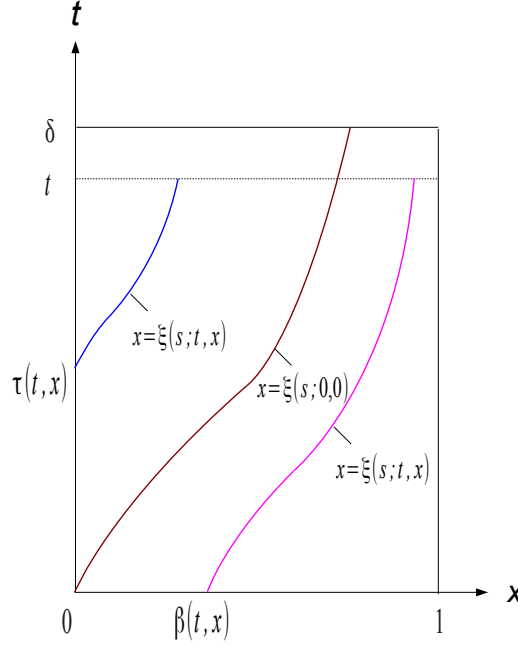


Fig. 2: The characteristics $\xi(s; t, x)$ and $\beta(t, x)$, $\tau(t, x)$.

We define f_p by

$$f_p(t, x) = \begin{cases} \frac{F_{in}(\tau(t, x))}{\rho_0 V_{eff} N(\tau(t, x))}, & \text{if } 0 \leq x \leq \xi(t; 0, 0) \leq 1, 0 \leq t \leq \delta, \\ f_p^0(\beta(t, x)), & \text{if } 0 \leq \xi(t; 0, 0) \leq x \leq 1, 0 \leq t \leq \delta. \end{cases} \quad (4.22)$$

Then it is easy to check that $(l, f_p) \in W^{1,\infty}(0, \delta) \times W^{1,\infty}((0, \delta) \times (0, 1))$ under the compatibility condition (3.2) and (l, f_p) is indeed a solution to Cauchy problem (2.2)-(2.4).

Step 3. Uniqueness of the solution.

Assume that Cauchy problem (2.2)-(2.4) has two solutions $(l, f_p), (\bar{l}, \bar{f}_p)$ on $[0, \delta] \times [0, 1]$. It follows that $(l(\cdot), f_p(\cdot, 1)) = (\bar{l}(\cdot), \bar{f}_p(\cdot, 1))$ since they are both the fixed point of the mapping $\mathfrak{F}: \Psi = \mathfrak{F}(\Psi)$ in $\Omega_{\delta, \varepsilon_1}$. This fact implies that the characteristics $\xi(\cdot; t, x)$ and $\bar{\xi}(\cdot; t, x)$ coincide with each other and therefore so do the solutions f_p and $\bar{f}_p$ by characteristic method.

Step 4. A priori estimate on the local solution.

By definition of f_p and assumption (4.1), it is clear that for all $t \in [0, \delta]$,

$$\|f_p(t, \cdot) - f_{pe}\|_{L^\infty} \leq \varepsilon. \quad (4.23)$$

Thanks to (2.4), (3.1), (4.23) and assumption (4.1), we get for all $t \in [0, \delta]$ that

$$\begin{aligned} |\dot{l}(t)| &= |F(l(t), N(t), f_p(t, 1)) - F(l_e, N_e, f_{pe})| \\ &\leq \|F\|_{W^{1,\infty}} (|l(t) - l_e| + |N(t) - N_e| + |f_p(t, 1) - f_{pe}|) \\ &\leq \|F\|_{W^{1,\infty}} |l(t) - l_e| + 2\varepsilon \|F\|_{W^{1,\infty}}, \end{aligned}$$

which yields (4.2) from (4.1) and Gronwall's inequality. On the other hand, from (4.22)

$$\begin{aligned} \left\| \frac{\partial f_p}{\partial x} \right\|_{L^\infty} &\leq \left\| \frac{\partial}{\partial x} \left(\frac{F_{in}(\tau(t, x))}{\rho_0 V_{eff} N(\tau(t, x))} \right) \right\|_{L^\infty} + \left\| \frac{\partial}{\partial x} f_p^0(\beta(t, x)) \right\|_{L^\infty} \\ &\leq \left\| \frac{F_{in}(\cdot)}{\rho_0 V_{eff} N(\cdot)} - f_{pe} \right\|_{W^{1,\infty}} \left\| \frac{\partial \tau}{\partial x} \right\|_{L^\infty} + \left\| f_p^0(\cdot) - f_{pe} \right\|_{W^{1,\infty}} \left\| \frac{\partial \beta}{\partial x} \right\|_{L^\infty}. \end{aligned} \quad (4.24)$$

Combining (4.20), (4.21), (4.24) and assumption (4.1), we obtain (4.3) which concludes the proof of Lemma 4.1. $\square$

5 Proof of Theorem 3.2

Before proving Theorem 3.2, let us recall a classical result on Cauchy problem of the following general linear transport equation

$$\begin{cases} u_t + a(t, x)u_x = b(t, x)u + c(t, x), & (t, x) \in (0, T) \times (0, 1), \\ u(0, x) = u_0(x), & x \in (0, 1), \\ u(t, 0) = h(t), & t \in (0, T), \end{cases} \quad (5.1)$$

where $a(t, x) > 0$, $a, a_x, b \in L^\infty((0, T) \times (0, 1))$ and $c \in L^2((0, T) \times (0, 1))$.

We recall from [4, Section 2.1], the definition of a weak solution to Cauchy problem (5.1).

Definition 5.1. *Let $T > 0$, $u_0 \in L^2(0, 1)$, $h \in L^2(0, T)$ be given. A weak solution of Cauchy problem (5.1) is a function $u \in C^0([0, T]; L^2(0, 1))$ such that for every $\tau \in [0, T]$, every test function $\varphi \in C^1([0, T] \times [0, 1])$ such that $\varphi(t, 1) = 0$, $\forall t \in [0, T]$, one has*

$$\begin{aligned} & - \int_0^\tau \int_0^1 \left(u[\partial_t \varphi + a \partial_x \varphi + (a_x + b)\varphi] + c\varphi \right) dx dt + \int_0^1 u(\tau, \cdot) \varphi(\tau, \cdot) dx \\ & - \int_0^1 u_0 \varphi(0, \cdot) dx - \int_0^\tau h a(\cdot, 0) \varphi(\cdot, 0) dt = 0. \end{aligned} \quad (5.2)$$

We have the following lemma

Lemma 5.1. *Let $T > 0$, $u_0 \in L^2(0, 1)$ and $h \in L^2(0, T)$ be given. Then, Cauchy problem (5.1) has a unique weak solution $u \in C^0([0, T]; L^2(0, 1))$ and the following estimate holds:*

$$\|u\|_{C^0([0, T]; L^2(0, 1))} \leq C(\|u_0\|_{L^2(0, 1)} + \|h\|_{L^2(0, T)} + \|c\|_{L^2((0, T) \times (0, 1))}), \quad (5.3)$$

where $C = C(T, \|a\|_{L^\infty((0, T) \times (0, 1))}, \|a_x\|_{L^\infty((0, T) \times (0, 1))}, \|b\|_{L^\infty((0, T) \times (0, 1))})$ is a constant independent of u_0, h, c .

For the proof of Lemma 5.1, one can refer to [27] for classical solution or [17, Theorem 23.1.2, Page 387] for Cauchy problem on $\mathbb{R}$ without boundary.

Proof of Theorem 3.2. By Theorem 3.1 and Lemma 5.1, it suffices to prove that the systems of $f_{p_{xx}}$ satisfies all the assumptions of Lemma 5.1.

Differentiating (2.2) with respect to x once and twice give us successively that

$$\begin{cases} \partial_t f_{p_x}(t, x) + \alpha_p(t, x) \partial_x f_{p_x}(t, x) = -\alpha_{p_x}(t, x) f_{p_x}(t, x), & \text{in } (0, T) \times (0, 1), \\ f_{p_x}(0, x) = f_{p_x}^0(x), & \text{in } (0, 1), \\ f_{p_x}(t, 0) = \frac{-l(t)}{\zeta N(t)} \cdot \frac{d}{dt} \left(\frac{F_{in}(t)}{\rho_0 V_{eff} N(t)} \right), & \text{in } (0, T), \end{cases} \quad (5.4)$$

and

$$\begin{cases} \partial_t f_{p_{xx}}(t, x) + \alpha_p(t, x) \partial_x f_{p_{xx}}(t, x) = -2\alpha_{p_x}(t, x) f_{p_{xx}}(t, x), & \text{in } (0, T) \times (0, 1), \\ f_{p_{xx}}(0, x) = f_{p_{xx}}^0(x), & \text{in } (0, 1), \\ f_{p_{xx}}(t, 0) = \frac{-l(t)}{\zeta N(t)} \left[\frac{F(l(t), N(t), f_p(t, 1))}{\zeta N(t)} \cdot \frac{d}{dt} \left(\frac{F_{in}(t)}{\rho_0 V_{eff} N(t)} \right) \right. \\ \quad \left. - \frac{d}{dt} \left(\frac{l(t)}{\zeta N(t)} \cdot \frac{d}{dt} \left(\frac{F_{in}(t)}{\rho_0 V_{eff} N(t)} \right) \right) \right], & \text{in } (0, T), \end{cases} \quad (5.5)$$

with

$$\alpha_p(t, x) = \frac{\zeta N(t) - x F(l(t), N(t), f_p(t, 1))}{l(t)}, \quad \alpha_{p_x}(t, x) = \frac{-F(l(t), N(t), f_p(t, 1))}{l(t)}. \quad (5.6)$$

From the assumptions that $f_p^0 \in H^2(0, 1)$, $\frac{F_{in}(\cdot)}{\rho_0 V_{eff} N(\cdot)} \in H^2(0, T)$ and the compatibility conditions (3.2) and (3.6), one easily concludes Theorem 3.2 by applying Lemma 5.1 to Cauchy problem (5.5). $\square$

6 Proof of Theorem 3.3

The idea to prove Theorem 3.3 is to construct a solution to Cauchy problem (2.2)-(2.4) which also satisfies the final conditions. The way of such construction is based on the controllability result of the linearized system together with fixed point arguments (see [8]).

For any fixed initial data $(l^0, f_p^0(x))$ and final data $(l^1, f_p^1(x))$ close to the equilibrium (l_e, f_{pe}) , we define a domain as a closed subset of $C^0([0, T])$ with respect to C^0 norm:

$$\Omega^{\varepsilon_1, T} := \left\{ \Phi \in C^0([0, T]) \mid \Phi(0) = (l^0, f_p^0(1)), \Phi(T) = (l^1, f_p^1(1)), \|\Phi(\cdot) - (l_e, f_{pe})\|_{C^0([0, T])} \leq \varepsilon_1 \right\},$$

where the constant $\varepsilon_1 > 0$ is determined by (4.6). We study the exact controllability for the linearized system deduced from equations (2.2)-(2.4), replacing $(l(t), f_p(t, 1))$ by $(a(t), b(t))$ in functions F and α_p :

$$\begin{cases} \dot{l}(t) = F^{a,b}(t), & \text{in } (0, T), \\ \partial_t f_p(t, x) + \alpha_p^{a,b}(t, x) \partial_x f_p(t, x) = 0, & \text{in } (0, T) \times (0, 1), \\ l(0) = l^0, \quad f_p(0, x) = f_p^0(x), & \text{in } (0, 1), \\ f_p(t, 0) = \frac{F_{in}^{a,b}(t)}{\rho_0 V_{eff} N^{a,b}(t)}, & \text{in } (0, T), \end{cases} \quad (6.1)$$

where

$$F^{a,b}(t) = N^{a,b}(t)g^{a,b}(t), \quad (6.2)$$

$$g^{a,b}(t) = \frac{\zeta K_d (L - a(t))}{[B\rho_0 + K_d(L - a(t))](1 - b(t))} - \frac{\zeta b(t)}{1 - b(t)}, \quad (6.3)$$

$$\alpha_p^{a,b}(t, x) = \frac{\zeta N^{a,b}(t) - x F^{a,b}(t)}{a(t)}. \quad (6.4)$$

By assumption $T > T_e$, it is possible to find controls $N^{a,b}(t)$ and $F_{in}^{a,b}(t)$ such that the solution of (6.1) satisfies (3.9)-(3.10).

For any $\Phi = (a, b) \in \Omega^{\varepsilon_1, T}$, we choose the control function $N^{a,b}(t)$ as

$$N^{a,b}(t) := \frac{l^1 - l^0}{T} \cdot \frac{1}{g^{a,b}(t)}, \quad t \in [0, T], \quad (6.5)$$

such that

$$F^{a,b}(t) = \frac{l^1 - l^0}{T}, \quad t \in [0, T], \quad (6.6)$$

thus $l(t)$ is a linear function of t :

$$l(t) = l^0 + \frac{l^1 - l^0}{T}t, \quad t \in [0, T]. \quad (6.7)$$

By assumption (3.12), it follows then

$$|l(t) - l_e| = |(1 - \frac{t}{T})(l^0 - l_e) + \frac{t}{T}(l^1 - l_e)| \leq 2\nu \leq 2\nu_1. \quad (6.8)$$

Next let us construct the desired control $F_{in}^{a,b}(t)$. For this purpose, we shall give the expression of $f_p(t, x)$ by characteristic method. We denote by $\xi^{a,b}(s; t, x)$ the characteristic passing through $(t, x) \in [0, T] \times [0, 1]$:

$$\begin{cases} \frac{d\xi^{a,b}(s; t, x)}{ds} = \alpha_p^{a,b}(s, \xi^{a,b}(s; t, x)) = \frac{\zeta N^{a,b}(s) - \xi^{a,b}(s; t, x)F^{a,b}(s)}{a(s)}, \\ \xi^{a,b}(t; t, x) = x. \end{cases} \quad (6.9)$$

Suppose that the characteristic $\xi^{a,b}(s; 0, 0)$ intersects the line $x = 1$ at $(t_0^{a,b}, 1)$. Then for every $t \in [0, t_0^{a,b}]$, the characteristic passing through $(t, 1)$ intersects with x -axis at $(0, \beta^{a,b}(t))$; for every $t \in (t_0^{a,b}, T]$, the characteristic passing through $(t, 1)$ intersects with t -axis at $(\tau^{a,b}(t), 0)$. The characteristic passing through $(T, 1)$ intersects with t -axis at $(t_1^{a,b}, 0)$ (see Fig. 3). Hence, we have

$$\xi^{a,b}(t_0^{a,b}; 0, 0) = 1, \quad \xi^{a,b}(0; t, 1) = \beta^{a,b}(t), \quad \xi^{a,b}(\tau^{a,b}(t); t, 1) = 0, \quad \xi^{a,b}(t_1^{a,b}; T, 1) = 0.$$

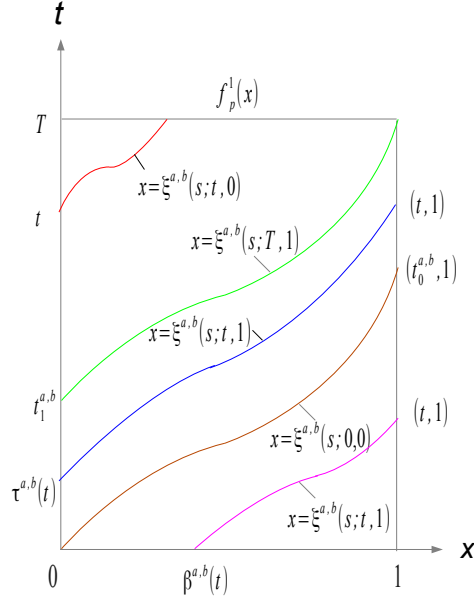


Fig. 3: The characteristics $\xi^{a,b}(s; t, x)$ and $t_0^{a,b}$, $\beta^{a,b}(t)$, $\tau^{a,b}(t)$, $t_1^{a,b}$.

Solving (6.9) and using (6.4) and (6.6), we obtain

$$e^{\int_0^{t_0^{a,b}} \frac{l^1 - l^0}{Ta(\sigma)} d\sigma} - \int_0^{t_0^{a,b}} \frac{\zeta N^{a,b}(\sigma)}{a(\sigma)} \cdot e^{\int_0^\sigma \frac{l^1 - l^0}{Ta(s)} ds} d\sigma = 1, \quad (6.10)$$

$$e^{\int_0^t \frac{l^1 - l^0}{Ta(\sigma)} d\sigma} - \int_0^t \frac{\zeta N^{a,b}(\sigma)}{a(\sigma)} \cdot e^{\int_0^\sigma \frac{l^1 - l^0}{Ta(s)} ds} d\sigma = \beta^{a,b}(t), \quad (6.11)$$

$$e^{\int_{\tau^{a,b}(t)}^t \frac{l^1 - l^0}{Ta(\sigma)} d\sigma} - \int_{\tau^{a,b}(t)}^t \frac{\zeta N^{a,b}(\sigma)}{a(\sigma)} \cdot e^{\int_{\tau^{a,b}(t)}^\sigma \frac{l^1 - l^0}{Ta(s)} ds} d\sigma = 1, \quad (6.12)$$

$$e^{\int_{t_1^{a,b}}^T \frac{l^1 - l^0}{Ta(\sigma)} d\sigma} - \int_{t_1^{a,b}}^T \frac{\zeta N^{a,b}(\sigma)}{a(\sigma)} \cdot e^{\int_{t_1^{a,b}}^\sigma \frac{l^1 - l^0}{Ta(s)} ds} d\sigma = 1. \quad (6.13)$$

We define the control function $F_{in}^{a,b}(t)$ as the following

$$F_{in}^{a,b}(t) = \begin{cases} h(t) \rho_0 V_{eff} N^{a,b}(t), & t \in [0, t_1^{a,b}], \\ f_p^1(\xi^{a,b}(T; t, 0)) \rho_0 V_{eff} N^{a,b}(t), & t \in [t_1^{a,b}, T], \end{cases} \quad (6.14)$$

where $h(t)$ is any artificial $W^{1,\infty}$ function satisfying

$$\|h(\cdot) - f_{pe}\|_{W^{1,\infty}} \leq \nu_1 \quad (6.15)$$

and the following compatibility conditions

$$h(0) = f_p^0(0), \quad h(t_1^{a,b}) = f_p^1(1). \quad (6.16)$$

Inspired by (4.22), we define a map $\mathcal{F} := (\mathcal{F}_1, \mathcal{F}_2) : \Omega^{\varepsilon_1, T} \rightarrow C^0([0, T])$, $\Phi \mapsto \mathcal{F}(\Phi)$ as

$$\mathcal{F}_1(\Phi)(t) := l(t) = l_0 + \frac{l^1 - l^0}{T}t, \quad t \in [0, T], \quad (6.17)$$

$$\mathcal{F}_2(\Phi)(t) := \begin{cases} f_p^0(\beta^{a,b}(t)), & t \in [0, t_0^{a,b}), \\ h(\tau^{a,b}(t)), & t \in (t_0^{a,b}, T], \end{cases} \quad (6.18)$$

where $t_0^{a,b}$, $\beta^{a,b}(t)$ and $\tau^{a,b}(t)$ are defined by (6.10), (6.11) and (6.12) respectively.

Now we prove that $\mathcal{F}$ is a contraction mapping on $\Omega^{\varepsilon_1, T}$ provided that $\nu_1 > 0$ is small. Obviously, the existence of the fixed point implies the existence of the desired control to the original nonlinear controllability problem.

Let $\nu_1 \leq \varepsilon_1/2$. By (3.12), (6.8), (6.15), (6.17) and (6.18), $\mathcal{F}(\Phi) \in \Omega^{\varepsilon_1, T}$ for all $\Phi \in \Omega^{\varepsilon_1, T}$.

For any $\bar{\Phi} = (\bar{a}, \bar{b}) \in \Omega^{\varepsilon_1, T}$, we denote by $\xi^{\bar{a}, \bar{b}}(s; t, x)$ the characteristic passing through $(t, x) \in [0, T] \times [0, 1]$ as in (6.9) upon replacing a, b by $\bar{a}, \bar{b}$. Correspondingly, we define $t_0^{\bar{a}, \bar{b}}$, $\beta^{\bar{a}, \bar{b}}(t)$, $\tau^{\bar{a}, \bar{b}}(t)$, $t_1^{\bar{a}, \bar{b}}$ as in (6.10), (6.11), (6.12) and (6.13) upon replacing a, b by $\bar{a}, \bar{b}$.

By definition of $\mathcal{F} = (\mathcal{F}_1, \mathcal{F}_2)$ in (6.17) and (6.18), we get $\mathcal{F}_1(\bar{\Phi}) \equiv \mathcal{F}_1(\Phi)$ and thus

$$\|\mathcal{F}(\bar{\Phi}) - \mathcal{F}(\Phi)\|_{C^0([0, T])} = \|\mathcal{F}_2(\bar{\Phi}) - \mathcal{F}_2(\Phi)\|_{C^0([0, T])} = \sup_{t \in [0, T]} |(\mathcal{F}_2(\bar{\Phi}) - \mathcal{F}_2(\Phi))(t)|.$$

Without loss of generality, we may assume that $t_0^{\bar{a}, \bar{b}} > t_0^{a,b}$. Hence, we need to estimate the point-wisely $|\mathcal{F}_2(\bar{\Phi})(t) - \mathcal{F}_2(\Phi)(t)|$ on the time interval $[0, t_0^{a,b}]$, $[t_0^{a,b}, t_0^{\bar{a}, \bar{b}}]$, $[t_0^{\bar{a}, \bar{b}}, T]$ respectively.

For any given $t \in [0, t_0^{a,b}]$, by (3.12) and (6.18), we have

$$\begin{aligned} |(\mathcal{F}_2(\bar{\Phi}) - \mathcal{F}_2(\Phi))(t)| &= \left| f_p^0(\beta^{\bar{a}, \bar{b}}(t)) - f_p^0(\beta^{a,b}(t)) \right| \\ &\leq \|f_{px}^0\|_{L^\infty} |\beta^{\bar{a}, \bar{b}}(t) - \beta^{a,b}(t)| \\ &\leq \nu_1 |\beta^{\bar{a}, \bar{b}}(t) - \beta^{a,b}(t)|. \end{aligned}$$

By (6.11), it is easy to get

$$|\beta^{\bar{a}, \bar{b}}(t) - \beta^{a,b}(t)| \leq C(\|\bar{a} - a\|_{C^0([0, T])} + \|\bar{b} - b\|_{C^0([0, T])}) \leq C\|\bar{\Phi} - \Phi\|_{C^0([0, T])}.$$

Here and hereafter, we denote by C various constants that are independent of $(\bar{\Phi}, \Phi)$. Therefore,

$$\sup_{t \in [0, t_0^{a,b}]} |(\mathcal{F}_2(\bar{\Phi}) - \mathcal{F}_2(\Phi))(t)| \leq C\nu_1 \|\bar{\Phi} - \Phi\|_{C^0([0, T])}. \quad (6.19)$$

For any given $t \in [t_0^{\bar{a}, \bar{b}}, T]$, by (6.15) and (6.18), we obtain

$$|(\mathcal{F}_2(\bar{\Phi}) - \mathcal{F}_2(\Phi))(t)| = |h(\tau^{\bar{a}, \bar{b}}(t)) - h(\tau^{a,b}(t))| \leq \nu_1 |\tau^{\bar{a}, \bar{b}}(t) - \tau^{a,b}(t)|. \quad (6.20)$$

By (6.9), for every $t \in [t_0^{a,b}, T]$,

$$\xi^{a,b}(s; t, 1) = e^{\int_s^t \frac{l^1 - l^0}{Ta(\sigma)} d\sigma} - \int_s^t \frac{\zeta N^{a,b}(\sigma)}{a(\sigma)} \cdot e^{\int_s^\sigma \frac{l^1 - l^0}{Ta(s)} ds} d\sigma, \quad s \in [\tau^{a,b}(t), T].$$

Therefore,

$$\sup_{s \in [\tau^{\bar{a}, \bar{b}}(t), T]} |\xi^{\bar{a}, \bar{b}}(s; t, 1) - \xi^{a, b}(s; t, 1)| \leq C(\|\bar{a} - a\|_{C^0([0, T])} + \|\bar{b} - b\|_{C^0([0, T])}). \quad (6.21)$$

Then, for any $t \in [t_0^{\bar{a}, \bar{b}}, T]$, we have

$$\begin{aligned} |\tau^{\bar{a}, \bar{b}}(t) - \tau^{a, b}(t)| &\leq \frac{1}{\inf \alpha_p^{a, b}} \left| \int_{\tau^{a, b}(t)}^{\tau^{\bar{a}, \bar{b}}(t)} \alpha_p^{a, b}(s; \xi^{a, b}(s; t, 1)) ds \right| \\ &= \frac{1}{\inf \alpha_p^{a, b}} \left| \int_{\tau^{\bar{a}, \bar{b}}(t)}^T \left(\alpha_p^{a, b}(s; \xi^{a, b}(s; t, 1)) - \alpha_p^{\bar{a}, \bar{b}}(s; \xi^{\bar{a}, \bar{b}}(s; t, 1)) \right) ds \right| \\ &\leq C \left(\|\bar{a} - a\|_{C^0([0, T])} + \|\bar{b} - b\|_{C^0([0, T])} \right) \\ &\leq C \|\bar{\Phi} - \Phi\|_{C^0([0, T])}, \end{aligned} \quad (6.22)$$

where

$$\inf \alpha_p^{a, b} := \inf_{\substack{(t, x) \in [0, T] \times [0, 1] \\ (a, b) \in \Omega^{\varepsilon_1, T}}} \alpha_p^{a, b}(t, x) > 0$$

is independent of Φ . Therefore,

$$\sup_{t \in [t_0^{\bar{a}, \bar{b}}, T]} |(\mathcal{F}_2(\bar{\Phi}) - \mathcal{F}_2(\Phi))(t)| \leq C\nu_1 \|\bar{\Phi} - \Phi\|_{C^0([0, T])}. \quad (6.23)$$

For any given $t \in [t_0^{a, b}, t_0^{\bar{a}, \bar{b}}]$, by (6.16) and (6.18), we have

$$\begin{aligned} |\mathcal{F}_2(\bar{\Phi}) - \mathcal{F}_2(\Phi)| &= |f_p^0(\beta^{\bar{a}, \bar{b}}(t)) - h(\tau^{a, b}(t))| \\ &\leq |f_p^0(\beta^{\bar{a}, \bar{b}}(t)) - f_p^0(0)| + |h(\tau^{a, b}(t)) - h(0)| \\ &\leq \|f_{p_x}^0\|_{L^\infty} |\beta^{\bar{a}, \bar{b}}(t)| + \|h_t\|_{L^\infty} |\tau^{a, b}(t)| \\ &\leq \nu_1 (|\beta^{\bar{a}, \bar{b}}(t)| + |\tau^{a, b}(t)|). \end{aligned} \quad (6.24)$$

Note that for any $t \in [t_0^{a, b}, t_0^{\bar{a}, \bar{b}}]$,

$$\xi^{\bar{a}, \bar{b}}(s; t, 1) = e^{\int_s^t \frac{l^1 - l^0}{T\bar{a}(\sigma)} d\sigma} - \int_s^t \frac{\zeta N^{\bar{a}, \bar{b}}(\sigma)}{\bar{a}(\sigma)} \cdot e^{\int_s^\sigma \frac{l^1 - l^0}{T\bar{a}(s)} ds} d\sigma, \quad s \in [0, t].$$

Then, using $\xi^{\bar{a}, \bar{b}}(0; t_0^{\bar{a}, \bar{b}}, 1) = 0$, it follows that

$$|\beta^{\bar{a}, \bar{b}}(t)| = |\xi^{\bar{a}, \bar{b}}(0; t, 1) - \xi^{\bar{a}, \bar{b}}(0; t_0^{\bar{a}, \bar{b}}, 1)| \leq C|t - t_0^{\bar{a}, \bar{b}}| \leq C|t_0^{\bar{a}, \bar{b}} - t_0^{a, b}|. \quad (6.25)$$

On the other hand, by (6.12) and note that $\tau^{a, b}(t_0^{a, b}) = 0$, we can prove that for any $t \in [t_0^{a, b}, t_0^{\bar{a}, \bar{b}}]$,

$$|\tau^{a, b}(t)| = |\tau^{a, b}(t) - \tau^{a, b}(t_0^{a, b})| \leq C|t - t_0^{a, b}| \leq C|t_0^{\bar{a}, \bar{b}} - t_0^{a, b}|. \quad (6.26)$$

By definition of $t_0^{\bar{a}, \bar{b}}$ and $t_0^{a, b}$, similarly to the derivation of (6.21) and (6.22), we get

$$|t_0^{\bar{a}, \bar{b}} - t_0^{a, b}| \leq C(\|\bar{a} - a\|_{C^0([0, T])} + \|\bar{b} - b\|_{C^0([0, T])}) \leq C\|\bar{\Phi} - \Phi\|_{C^0([0, T])}. \quad (6.27)$$

Then it follows from (6.24), (6.25), (6.26) and (6.27), that

$$\sup_{t \in [t_0^{a,b}, t_0^{\bar{a}, \bar{b}}]} |(\mathcal{F}_2(\bar{\Phi}) - \mathcal{F}_2(\Phi))(t)| \leq C\nu_1 \|\bar{\Phi} - \Phi\|_{C^0([0,T])}. \quad (6.28)$$

Combining (6.19), (6.23) and (6.28), we can choose ν_1 small enough such that

$$\|\mathcal{F}(\bar{\Phi}) - \mathcal{F}(\Phi)\|_{C^0([0,T])} = \|\mathcal{F}_2(\bar{\Phi}) - \mathcal{F}_2(\Phi)\|_{C^0([0,T])} \leq \frac{1}{2} \|\bar{\Phi} - \Phi\|_{C^0([0,T])}. \quad (6.29)$$

Then the contraction mapping theorem implies that $\mathcal{F}$ has a unique fixed point $(l(\cdot), f_p(\cdot, 1))$ in $\Omega^{\varepsilon_1, T}$. Therefore we find a solution (l, f_p) to Cauchy problem (2.2)-(2.4) which also satisfies the final conditions (3.9)-(3.10). Moreover, because of the uniqueness of solution, the desired control function $N(t)$ and $F_{in}(t)$ can be chosen by substituting the fixed point $(l(\cdot), f_p(\cdot, 1))$ into (6.5) and (6.14) respectively. This concludes the proof of Theorem 3.3. $\square$

7 Acknowledgements

The authors would like to thank Professor Jean-Michel Coron, Professor Miroslav Krstic and Professor Bernhard Maschke for their helpful comments and constant support. The authors are thankful to the support of the ERC advanced grant 266907 (CPDENL) and the hospitality of the Laboratoire Jacques-Louis Lions of Université Pierre et Marie Curie.

Mamadou Diagne has been supported by the French National Research Agency sponsored project ANR-11-BS03-0002 HAMECMOPSYs as a PhD candidate at LAGEP (Laboratoire d'Automatique et du Génie des Procédés) of the university Claude Bernard Lyon I and is currently supported by the CCSD (Cymer Center for Control Systems and Dynamics) at the university of California San Diego as a postdoctoral fellow. Peipei Shang was partially supported by the National Science Foundation of China (No. 11301387) and by the Specialized Research Fund for the Doctoral Program of Higher Education (No. 20130072120008). Zhiqiang Wang was partially supported by the National Science Foundation of China (No. 11271082) and by the State Key Program of National Natural Science Foundation of China (No. 11331004).

References

- [1] S. Bianchini and A. Bressan. Vanishing viscosity solutions of nonlinear hyperbolic systems. *Ann. of Math.*, 161(1):223–342, 2005.
- [2] K. Bouchemal and F. Couenne and S. Briancon and H. Fessi, and M. Tayakout. Polyamides nanocapsules : Modeling and wall thickness estimation. *AIChE Journal*, 52:2161–2170, 2006.

- [3] A. Bressan. *Hyperbolic systems of conservation laws*, volume 20 of *Oxford Lecture Series in Mathematics and its Applications*. Oxford University Press, Oxford, 2000. The one-dimensional Cauchy problem.
- [4] J.-M. Coron. *Control and nonlinearity*, volume 136 of *Mathematical Surveys and Monographs*. American Mathematical Society, Providence, RI, 2007.
- [5] J.-M. Coron. Local controllability of a 1-D tank containing a fluid modeled by the shallow water equations. *ESAIM Control Optim. Calc. Var.*, 8:513–554, 2002.
- [6] J.-M. Coron and O. Glass, and Z. Wang. Exact boundary controllability for 1-D quasilinear hyperbolic systems with a vanishing characteristic speed. *SIAM J. Control Optim.*, 48:3150–3122, 2010.
- [7] J.-M. Coron and M. Kawski, and Z. Wang. Analysis of a conservation law modeling a highly re-entrant manufacturing system. *Discrete Contin. Dyn. Syst. Ser. B*, 14(4):1337–1359, 2010.
- [8] J.-M. Coron and Z. Wang. Controllability for a scalar conservation law with nonlocal velocity. *J. Differential Equations*, 252:181–201, 2012.
- [9] M. Gugat and G. Leugering. Global boundary controllability of the de St. Venant equations between steady states. *Ann. Inst. H. Poincaré Anal. Non Linéaire.*, 20:1–11, 2003.
- [10] N. Daraoui and P. Dufour and H. Hammouri, and A. Hottot. Model predictive control during the primary drying stage of lyophilisation. *Control Engineering Practice*, 18(5):483–494, 2010.
- [11] M. Diagne and V. Dos Santos Martins and F. Couenne and B. Maschke. Well posedness of the model of an extruder in infinite dimension. In *Decision and Control and European Control Conference (CDC-ECC), 2011 50th IEEE Conference on*, pages 1311–1316, 2011.
- [12] M. Diagne and V. Dos Santos Martins and F. Couenne and B. Maschke, and C. Jallut. Modélisation et commande d’un système d’équations aux dérivées partielles à frontière mobile : application au procédé d’extrusion. *Journal Européen des Systèmes Automatisés*, 45:665–691, 2011.
- [13] M. Diagne and P. Shang and Z. Wang. Feedback stabilization for the mass balance equations of an extrusion process. *IEEE Transactions on Automatic Control*, 2015, doi=10.1109/TAC.2015.2444232.

- [14] M. Diagne and P. Shang and Z. Wang. Feedback Stabilization of a Food Extrusion Process Described by 1D PDEs Defined on Coupled Time-Varying Spatial Domains *12th IFAC Workshop on Time Delay Systems*, June 28-30, 2015 Ann Arbor, MI, USA, pages 51–56, 2015.
- [15] E. Godlewski and K.-C. Le Than and P.A. Raviart. The numerical interface coupling of nonlinear systems of conservation laws: II. the case of systems. *ESAIM: Mathematical Modelling and Numerical Analysis*, 39(4):649–692, 2005.
- [16] E. Godlewski and P.-A. Raviart. The numerical interface coupling of nonlinear hyperbolic systems of conservation laws: I. the scalar case. *Numer. Math.*, 97:81–130, 2004.
- [17] L. Hörmander. *The analysis of linear partial differential operators. III*, volume 274 of *Grundlehren der Mathematischen Wissenschaften [Fundamental Principles of Mathematical Sciences]*. Springer-Verlag, Berlin, 1994. Pseudo-differential operators, Corrected reprint of the 1985 original.
- [18] E. K. Kim and J. L. White. Isothermal transient startup for starved flow modular co-rotating twin screw extruder. *Polymer Engineering and Science*, 40:543–553, 2004.
- [19] E. K. Kim and J. L. White. Non-isothermal transient startup for starved flow modular co-rotating twin screw extruder. *International Polymer Processing*, 15:233–241, 2004.
- [20] M. K. Kulshrestha and C.A. Zaror. An unsteady state model for twin screw extruders. *Tran IChemE, PartC*, 70:21–28, 1992.
- [21] P. G. LeFloch. *Hyperbolic systems of conservation laws*. Lectures in Mathematics ETH Zürich. Birkhäuser Verlag, Basel, 2002. The theory of classical and nonclassical shock waves.
- [22] C. H. Li. Modelling extrusion cooking. *Mathematical and Computer Modelling*, 33:553–563, 2001.
- [23] T.-T. Li. *Controllability and observability for quasilinear hyperbolic systems*. American Institute of Mathematical Sciences (AIMS), Springfield, MO, 2010.
- [24] T.-T. Li. *Global classical solutions for quasilinear hyperbolic systems*. Research in Applied Mathematics **32**, John Wiley & Sons, Chichester, 1994.
- [25] T.-T. Li and Y. Jin. Semi-global c_1 solution to the mixed initial-boundary value problem for quasilinear hyperbolic systems. *Chinese Ann. Math. Ser. B*, 22:325–336, 2001.
- [26] T.-T. Li and B. Rao. Exact boundary controllability for quasi-linear hyperbolic systems. *SIAM J. Control Optim.*, 41:1748–1755, 2003.

- [27] T.-T. Li and W. Yu. *Boundary value problems for quasilinear hyperbolic systems*. Duke University Mathematics Series, V. Duke University Mathematics Department, Durham, NC, 1985.
- [28] T. Liu and T. Yang. Well-posedness theory for hyperbolic conservation laws. *Comm. Pure Appl. Math.*, 52(12):1553–1586, 1999.
- [29] N. Petit. Control problems for one-dimensional fluids and reactive fluids with moving interfaces. In *Advances in the theory of control, signals and systems with physical modeling*, volume 407 of *Lecture notes in control and information sciences*, pages 323–337, Lausanne, Dec 2010.
- [30] E. Purlis and V. O. Salvadori. A moving boundary problem in a food material undergoing volume change-Simulation of bread baking. *Food Research International*, 43:949–958, 2008.
- [31] D. L. Russell. Controllability and stabilizability theory for linear partial differential equations: recent progress and open questions. *SIAM Rev.*, 20:639–739, 1978.
- [32] P. Shang and Z. Wang. Analysis and control of a scalar conservation law modeling a highly re-entrant manufacturing system. *J. Differential Equations*, 250(2):949–982, 2011.
- [33] S. A. Velardi and A. A. Barresi. Development of simplified models for the freeze-drying process and investigation of the optimal operating conditions. *Chemical Engineering Research and Design*, 86:9–22, 2008.
- [34] Z. Wang. Exact controllability for nonautonomous first order quasilinear hyperbolic systems. *Chinese Ann. Math. Ser. B*, 27:643–656, 2006.